


## TYPICAL PROPERTIES OF 50CW White Cavitated Polypropylene

Spectralite 50CW is a white cavitated, co-extruded, non-heat sealable, two side treated, biaxially oriented polypropylene film. It features a high yield, good tear resistance, good opacity, grease and water resistance.

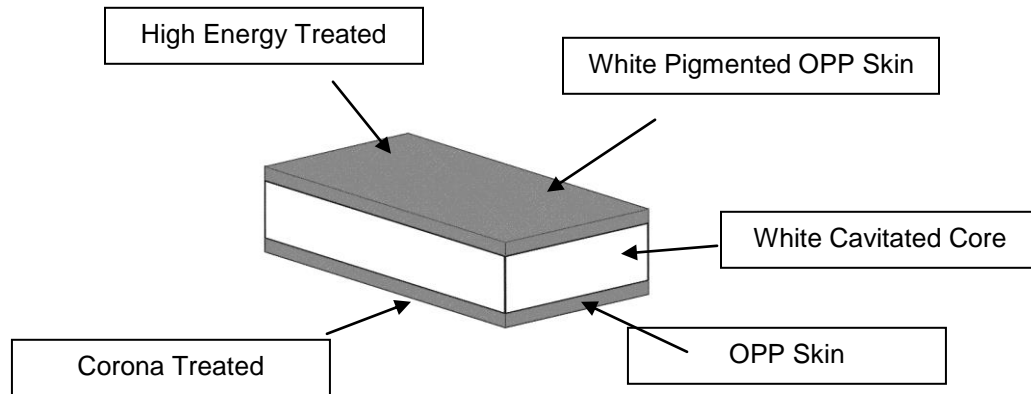

Properties	Test Method	Units	Typical Data
Tensile Strength	ASTM D882	PSI	MD 10,000 - 13,100 TD 20,000 - 23,200
Elongation	ASTM D882	%	MD 120 - 150 TD 40 - 60
Coefficient of Friction	ASTM D1894		(Kinetic-Film to Film) 0.35
Shrinkage	5 min., 266°F (air oven)	%	MD <8 TD <4

Thickness (mils)	1.0	1.6	2.2	3.2
Yield (sq.in./lb.)	44,000	28,100	19,700	13,200
Opacity (%) ASTM D589-97	76	88	93	92

The information herein, is to the best of our knowledge, true, and accurate. However, since conditions of use are beyond our control, all recommendations or suggestions are presented without guarantee or responsibility on our part. All property values are developed according to ASTM.

**FOR MORE INFORMATION CONTACT OUR SALES DEPARTMENT AT 800-848-6982**

January 2015