

29PP PRODUCT INFORMATION SHEET

Clay Coated Laminated Paper Pouch Structure FDA Compliant for direct food contact

Description


An easy-open clay coated paper faced/foil lamination structure for use in flexible packaging applications. It is heat sealable with excellent printability. It has good moisture and oxygen barrier properties. It can be surface printed or used unprinted.

Performance Characteristics

- Excellent Printability
- Puncture Resistant
- Good Stiffness
- Good Moisture & Oxygen Barrier Properties

Typical Applications

- Commonly used for packaging wet or dry packed flat products, non-aggressive liquids and powdered or granular products
- Runs well on dual web fed, flat, vertical fill
- Runs well on dual web, flat, horizontal fill
- Runs well on single web, flat, horizontal fill

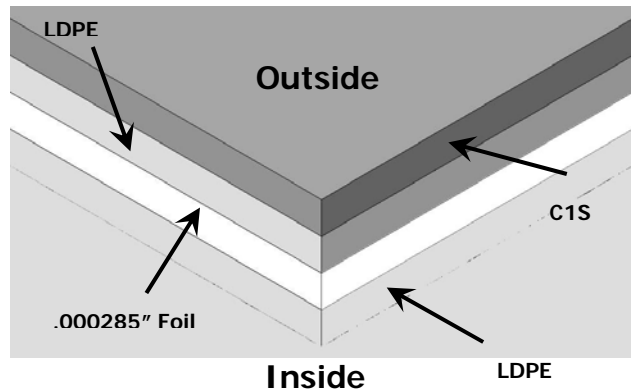

Primary Markets

- Low alcohol towelettes
- Tablets
- Condoms
- Gel-caps
- Non-aggressive powders, lotions, shampoos

| Product | Gauge | Yield Sq. inch per Lb. |
|--|--------|---------------------------|
| 29PP - 25# C1S Paper Faced Pouch 25# C1S / 7.4# LDPE / .000285" Foil / 15# LDPE | .00343 | 7,248 |
| 29PP - 35# C1S Paper Faced Pouch 35# C1S / 7.4# LDPE / .000285" Foil / 15# LDPE | .00382 | 6,066 |

Terms 1% 10 Net 30 days / Freight Collect - Not combinable with other MPI products



Flexible Packaging Films

February 2012

FOR MORE INFORMATION CONTACT OUR SALES DEPARTMENT AT 800.269.0962



Flexible Packaging Films

February 2012

TECHNICAL DATA SHEET

| Properties | Units | Typical Values | |
|--------------------------------|--------------------------------|----------------|-------|
| Gauge | mil | 3.43 | 3.82 |
| Yield (+/- 10%) | in ² /lb | 7,248 | 6,066 |
| MVTR @ 100°F (38°C), 90% RH | g/100 in ² /24 hr | <0.01 | <0.01 |
| OTR @ 73°F (23°C), 0% RH | cc/100 in ² / 24 hr | <0.01 | <0.01 |

Storage & Handling: Flexible packaging films should be placed in the processing area 24 hours prior to processing to acclimatize. Even though these films are largely unaffected by climatic conditions, they should be stored at 72 degrees F and 50% RH. Under suitable storage conditions, the film can be stored for a period of six months without any risk of deterioration. The customer is responsible for determining the shelf life of the packaged product.

Required Information

Project Name: _____

New or Existing Project: _____

If existing, what is the current product spec configuration or product code being used?

What is being packaged? (Wet or Dry Goods) _____

If wet, does it have high alcohol or grease content? _____

If dry, is it powder or granular? _____

What are the primary ingredients? _____

The information herein, is to the best of our knowledge, true, and accurate. However, since conditions of use are beyond our control, all recommendations or suggestions are presented without guarantee or responsibility on our part.